



Simple Disk Skimmer

Simple Disk Skimmer Tackles Heavy Oil Loads

- Handles heavy oil loads from coolant and washwater applications
- Intermittent-duty motor (refer to Smart Disk Skimmer for continuous-duty motor and coolant-free output)
- One year warranty (lifetime on disk and wiper set)
- Up to 5 gallons per hour oil removal capacity
- 1/2"x12" (13x300mm) sump access needed (for 12" model)
- Maximum temperatures;
80°F (27°C) for high-impact disks for coolant
212°F (100C) for high-temperature disks for wash water
- Recommended accessory shown below



Timer

Model	Part Number	Description
L Skimmer	LH300	Simple Disk Skimmer, 12" high-impact disk, reach of 4.5"
	LH460	Simple Disk Skimmer, 18" high-impact disk, reach of 7.0"
	LH610	Simple Disk Skimmer, 24" high-impact disk, reach of 9.5"
	LW300	Simple Disk Skimmer, 12" high-temperature disk, reach of 4.5"
	LW460	Simple Disk Skimmer, 18" high-temperature disk, reach of 7.0"
	LW610	Simple Disk Skimmer, 24" high-temperature disk, reach of 9.5"
Timer	XETIMER	Timer for mechanical skimmers 24 hour, 3 setting


To determine required reach, measure the distance from the mounting point to the lowest operating fluid level.



Smart Disk Skimmer

Smart Disk Skimmer Saves You Time & Money


- Saves you nearly \$300 per year over Simple Disk Skimmers
- Integrated Diverter™ knows the difference between floating tramp oils and coolant
- Continuous-duty, fan-cooled motor
- Rugged steel construction
- Lifetime warranty on disk and scrapers, one year on all other parts
- 2 quarts per hour oil removal capacity
- 1/2x12" (13x300mm) sump access needed (for 12" disk model)
- Maximum temperatures of 80°F (27°C)
- Recommended accessory shown below

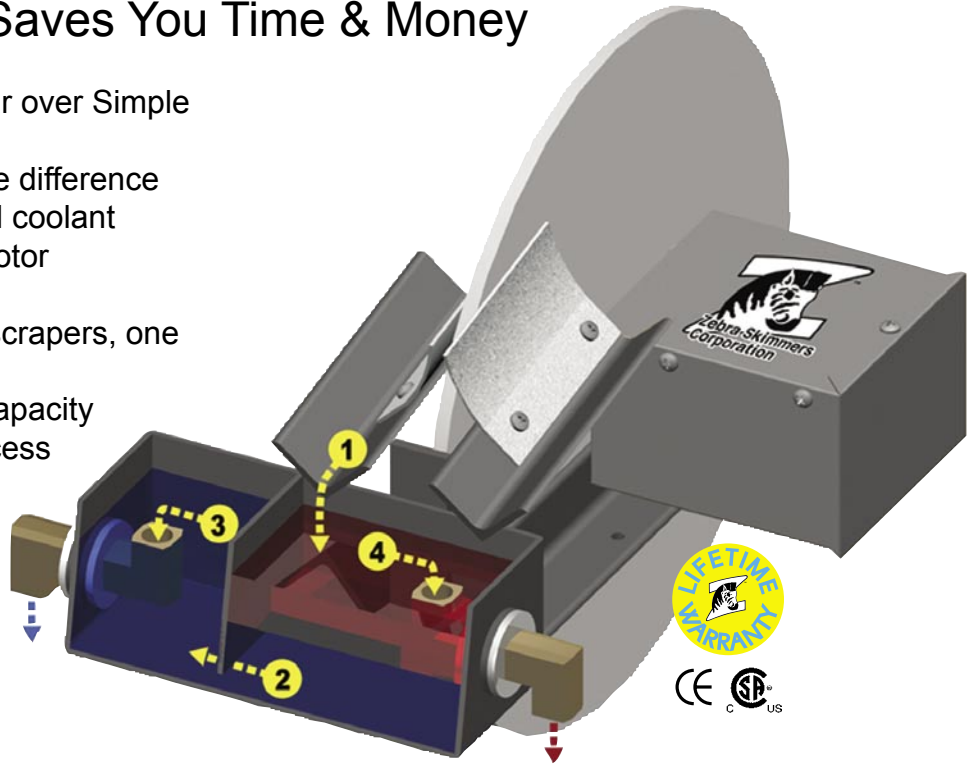

Timer

How It Works

1. Oil (tramp and coolant) enter here
2. Coolant sinks and passes under this weir
3. Clean coolant returns to your sump here
4. Tramp oils discharge to waste container here

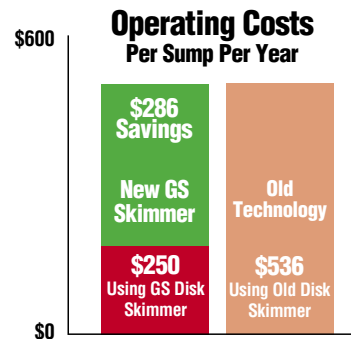

Model	Part Number	Description
GS Skimmer	GS4H300	Smart Disk Skimmer, 12" high-impact disk, reach of 4.5"
	GS4H460	Smart Disk Skimmer, 18" high-impact disk, reach of 7.0"
	GS4H610	Smart Disk Skimmer, 24" high-impact disk, reach of 9.5"
Timer	XETIMER	Timer for mechanical skimmers 24 hour, 3 setting

To determine required reach, measure the distance from the mounting point to the lowest operating fluid level.

